

BEGA**31 426**

Wall luminaire » Straßburg «



Project · Reference number

Date

Product data sheet

Application

Wall luminaire with crystal bubble glass.
For many lighting tasks in or on buildings.

Product description

Luminaire made of aluminium alloy
and stainless steel
BEGA Unidure® coating technology
Crystal bubble glass
2 mounting holes \varnothing 5.2 mm
Distance apart 70 mm
1 cable entry for mains supply cable
up to \varnothing 10,5 mm
Connecting terminal 2.5[□]
with plug connection
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies
 \geq 1 mm and splash water
Impact strength IK02
Protection against mechanical
impacts < 0.2 joule
 – Safety mark
CE – Conformity mark
Weight: 2.2 kg

Lamp

Luminaire with screw base E 27
Lamp output max. 60 W
This product contains light source of energy
efficiency class E

Supplied lamp

BEGA LED lamp **13584**
LED Retrofit 7 W · 805 lm · 3000 K

Luminaire efficiency: 45%

Additional BEGA LED lamps are available for
this luminaire:


13586 LED 7 W · 805 lm · 3000 K
dimmable

13588 LED 8 W · 1055 lm · 3000 K

13590 LED 12 W · 1400 lm · 3000 K

13592 LED 12 W · 1400 lm · 3000 K
dimmable

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

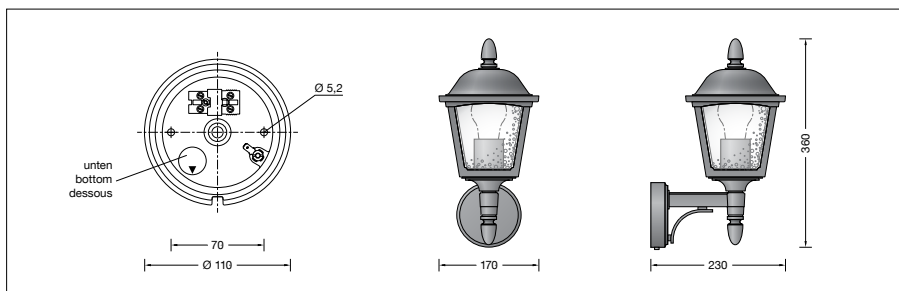

Lighting technology

Luminaire data for the DIALux lighting design
program for outdoor lighting, street lighting
and indoor lighting, as well as luminaire data in
EULUMDAT and IES format are available on the
BEGA website at www.bega.com.