

**BEGA****31 203**

Wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Wall luminaire for many lighting tasks on or in buildings.  
Ideal for places where a soft and uniform light distribution is required.

### Product description

Luminaire made of aluminium alloy, aluminium and stainless steel  
BEGA Unidure® coating technology  
Opal glass  
Silicone gasket  
Mounting plate with 2 fixing holes  $\varnothing$  4.8mm · 40mm spacing  
1 cable entry for mains supply cable up to  $\varnothing$  10,5mm  
Connection terminal 2.5<sup>2</sup>  
Earth conductor connection  
Lampholder E 14  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  $\geq$  1 mm and splash water  
Impact strength IK04  
Protection against mechanical impacts  $<$  0.5 joule  
 – Safety mark  
 – Conformity mark  
Weight: 1.6 kg

### Lamp

Luminaire with screw base E 14  
Lamp output max. 60 W  
This product contains light source of energy efficiency class E


Supplied lamp  
BEGA LED lamp **13594**  
LED Retrofit 4 W · 470 lm · 3000 K

Luminaire efficiency: 55%

Additional BEGA LED lamps are available for this luminaire:

**13596** LED 4,5 W · 470 lm · 3000 K  
dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

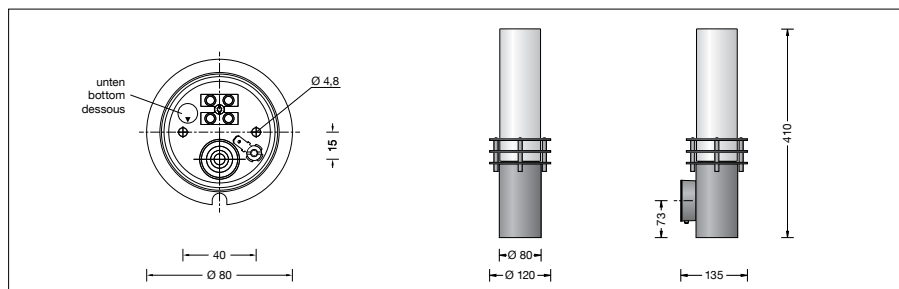

### Lighting technology

Luminaire data for the DIALux lighting design program for outdoor lighting, street lighting and indoor lighting, as well as luminaire data in EULUMDAT and IES format are available on the BEGA website at [www.bega.com](http://www.bega.com).

### Article No. 31 203

Colour graphite or bronze  
graphite – article number  
bronze – article number + **B**