


Technique for cable laying and overhead line construction



- Energy cable laying up to 680 kV
- Fibre optic, mini and micro cables
- Cable winding and length measuring
- Overhead line construction up to 110 kV
- Seminars and product instructions

Cable connecting grips

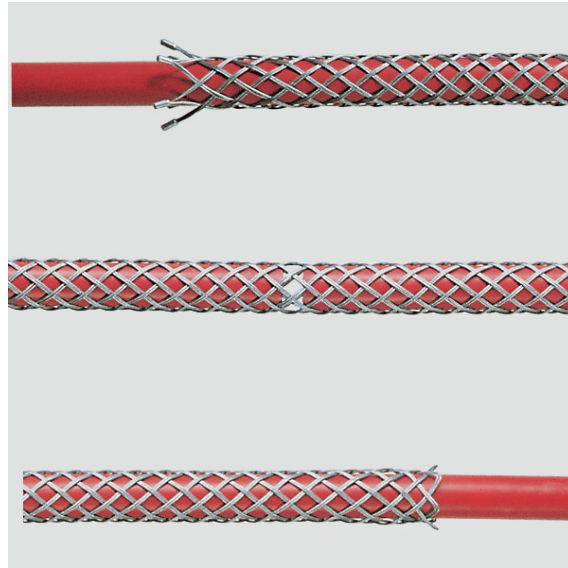

Cable connecting grips, galvanized Bowden wire. All Vetter cable grips are handmade therefore of high flexibility. They adapt easy at any difference in cable diameter and are therefore simple to handle. Other versions, e.g. reinforced, different length or in stainless steel are available. For connecting of two cables to follow.

- For connection of two cut cables. Not for use in overhead lines.
- L, the mentioned mesh length are without a cable in.
- The real length on the cable can be, depending on the cable diameter, much shorter.
- kN = minimum breaking load

Code	Type	C-D	kN	L mm	kg
248010	KV 15	10-15	10,2	1500	0,13
248030	KV 20	15-20	20,4	1500	0,27
248050	KV 25	20-25	20,4	2000	0,40
248080	KV 30	25-30	24,3	2000	0,48
248140	KV 40	30-40	35,1	2000	0,60
248190	KV 50	40-50	48,0	2000	0,70
248250	KV 60	50-60	48,0	2500	0,80
248300	KV 70	60-70	63,9	2500	1,00
248350	KV 90	70-90	83,7	2500	1,20