

MITRA LED BASIC 3450LM 3000K MAT IP66 I KL. (45W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	957147
Ingress protection:	IP66
Rated power of the luminaire [W]*:	45
Luminous flux [lm]*:	3450
Colour temperature [K]:	3000
SDCM:	≤ 5
Colour rendering index:	>80
Electrical protection class:	I
Energy efficiency class:	F
Material of the body:	PP+FG

CHARACTERISTICS

LED fitting with high luminous efficiency and an energy-saving, integrated LED panel. Body made of polypropylene (PP) with glass fiber (GF), aluminum handle and polycarbonate diffuser (PC).

The lamp is available with general G1 light distribution - with a frosted diffuser. IP66 ingress protection class and IK07 impact-rating features make this fitting shock-resistant (vandal-resistant). The integrated handle allows for top mounting to the pole. Colour of the body: gray (RAL 7010).

Standard equipped with:
- surge protection (SP10kV),
- H07RN-F cable with a length of 0.6m.

APPLICATION

Fitting used in open spaces to lighten: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and mounting: post-top mounting. Mounting grip integrated with the fitting.


MITRA LED BASIC 3450LM 3000K MAT IP66 I KL. (45W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	957147	Colour of the body:	grey
EAN:	5905963957147	Dimensions (H/W/T/S) [mm]:	398/398/174
Light source:	LED module	Ingress protection:	IP66
Nominal power [W]:	37	Mounting version:	top
Rated power of the luminaire [W]:	45	Working temperature [°C]:	from -40 to +35
Luminous flux [lm]:	3450	Wire type:	H07RN-F
Luminous efficacy [lm/W]:	79	Number on the palette [pcs]:	48
Energy efficiency class:	F	Net weight of the luminaire [kg]:	1.900
Electrical protection class:	I	Warranty [years]:	3
Colour temperature [K]:	3000	Category type:	street lighting
Colour rendering index:	>80	Category of application:	parkings and bicycle paths
SDCM:	≤ 5	LED lifespan L70B50 [h]:	120000
Surge protection [kV]:	10	ULOR:	0%
Diffuser material:	PC	Warranty [years]:	5
Diffuser type:	MAT	Manual:	Download PDF
Material of the body:	PP+FG	CE certificate:	101/2023

LIGHT CURVES

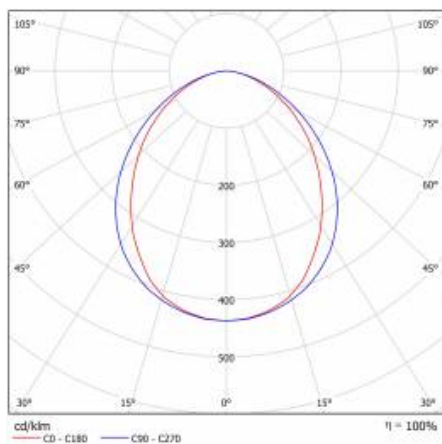


MITRA LED BASIC 3450LM 3000K MAT IP66 I KL. (45W)

DETAILED CARD

TECHNICAL DETAILS



MITRA LED



MITRA LED

Card creation date: 08 August 2022

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 101/2023