

# Rittal – The System.

Faster – better – everywhere.

## Cable gland, brass – SZ 2411.801

Date : Aug 18, 2021

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Cable gland, brass – SZ 2411.801

created: 18.08.2021 on [www.rittal.com/com-en](http://www.rittal.com/com-en)

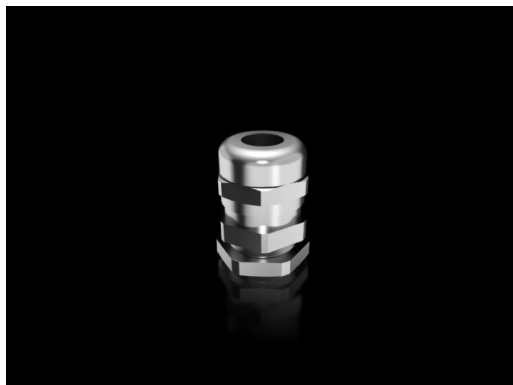

## Product description

**Benefits:** Because the gland and lock nut are sold together in a single pack, this saves additional ordering and storage.  
Clamping membranes for even tightening and strain relief to protect the cables

**Material:** Brass  
Seal: TPE/NBR

**Surface finish:** Nickel-plated

**Protection category  
IP to IEC 60 529:** IP 68 (5 bar, 30 min)

## Product description

**Dimensions:** Height: 22 mm

**Thread:** Type: M12 x 1.5

**Thread length:** 6 mm

**Min. cable diameter:** 3 mm

**Max. cable diameter:** 6.5 mm

**Operating  
temperature:** Operation (environment): -40 °C...+100 °C

**Width across flats:** 14 mm

**Packs of:** 15 pc(s).

<b>Weight/pack:</b>	0.24 kg
<b>Copper weight (kg per piece):</b>	0
<b>EAN:</b>	4028177809994
<b>Customs tariff number:</b>	73269098
<b>ETIM 7.0:</b>	EC000441
<b>ETIM 6.0:</b>	EC000441
<b>eCl@ss 8.0/8.1:</b>	27149109
<b>eCl@ss 6.0/6.1:</b>	27149109
<b>Product description:</b>	SZ Cable gland, brass, size: M12x1,5, for cables ø 3-6.5 mm
<b>Approvals</b>	
<b>Approvals:</b>	UR + C-UR VDE
<b>Certificates:</b>	NA
<b>Declarations:</b>	Declaration of conformity