


Thin wall shrinking tubes RTS 1,6/0,8 ÷ 50,8/25,4

material: poliolefin
 operating temp: -55°C to +125°C
 fully shrink temp.: +125°C
 shrink ratio: 2:1
 flammability: self-extinguishing
 halogen free: yes
 tolerance: ±5%




TYP	SIZE				LENGTH [m]	QUANTITY [pcs.]
	AS SUPPLIED		AFTER SHRINKING			
	OUTER DIAMETER	INNER DIAMETER	WALL THICKNESS			
D ["]	D [mm]	d [mm]	s [mm]			
RTS-1,6/0,8	1/16	1,6	0,8	0,28	1	10
RTS-2,4/1,2	3/32	2,4	1,2	0,35	1	10
RTS-3,2/1,6	1/8	3,2	1,6	0,40	1	10
RTS-4,8/2,4	3/16	4,8	2,4	0,50	1	10
RTS-6,4/3,2	1/4	6,4	3,2	0,55	1	10
RTS-9,5/4,8	3/8	9,5	4,8	0,60	1	10
RTS-12,7/6,4	1/2	12,7	6,4	0,60	1	10
RTS-19,0/9,5	3/4	19,0	9,5	0,80	1	5
RTS-25,4/12,7	1	25,4	12,7	0,90	1	5
RTS-38,1/19,1	1 1/2	38,1	19,1	1,00	1	5
RTS-50,8/25,4	2	50,8	25,4	1,00	1	2

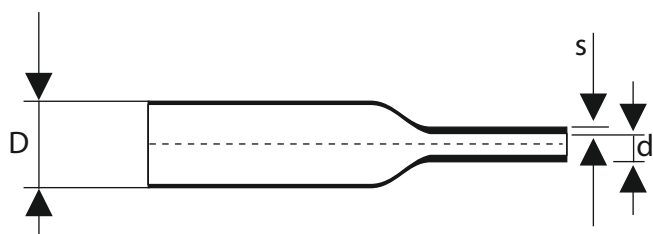



Thin wall shrinking tubes RTS 4,0/1,0 ÷ 8,0/2,0

material: poliolefin
 operating temp: -55°C to +135°C
 fully shrink temp.: +135°C
 shrink ratio: 4:1
 flammability: self-extinguishing
 halogen free: no
 tolerance: ±5%

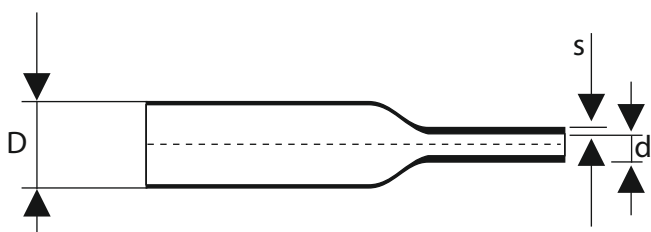


TYP	SIZE				LENGTH [m]	QUANTITY [pcs.]
	AS SUPPLIED		AFTER SHRINKING			
	OUTER DIAMETER		INNER DIAMETER	WALL THICKNESS		
D ["]	D [mm]	d [mm]	s [mm]			
RTS-4,0/1,0	-	4,0	1,0	0,45	1	10
RTS-8,0/2,0	-	8,0	2,0	0,60	1	10





Thin wall shrinking tubes RTS 1,6/0,8 ÷ 50,8/25,4 clear

material: poliolefin
color: clear
operating temp: -55°C to +105°C
fully shrink temp.: +105°C
shrink ratio: 2:1
halogen free: yes
tolerance: ±5%

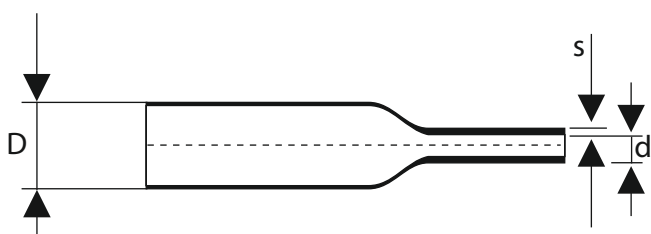

TYP	SIZE				LENGTH [m]	QUANTITY [pcs.]
	AS SUPPLIED		AFTER SHRINKING			
	OUTER DIAMETER		INNER DIAMETER	WALL THICKNESS		
D ["]	D [mm]	d [mm]	s [mm]			
RTS-1,6/0,8	1/16	1,6	0,8	0,28	1	10
RTS-2,4/1,2	3/32	2,4	1,2	0,35	1	10
RTS-3,2/1,6	1/8	3,2	1,6	0,40	1	10
RTS-4,8/2,4	3/16	4,8	2,4	0,50	1	10
RTS-6,4/3,2	1/4	6,4	3,2	0,55	1	10
RTS-9,5/4,8	3/8	9,5	4,8	0,60	1	10
RTS-12,7/6,4	1/2	12,7	6,4	0,60	1	10
RTS-19,0/9,5	3/4	19,0	9,5	0,80	1	5
RTS-25,4/12,7	1	25,4	12,7	0,90	1	5
RTS-38,1/19,1	1 1/2	38,1	19,1	1,00	1	5
RTS-50,8/25,4	2	50,8	25,4	1,00	1	2